



ROLLER DRILL AND ROLLER



ROLLER SEED DRILL



Option of hydraulic rear wheels



Hydraulically operated clutch for engaging and disengaging the drive



Lighting kit is standard on the Roller drill



High/low ratio giving a greater range of sowing rates



Seed is diverted into this tray for easy and accurate calibration



Agitator shaft is standard to help prevent seed compaction and vees for better seed flow



ROLLER



High underbody clearance for transport (hydraulic transport wheels optional)



Safety support chain for transport with easy to remove pin



Scraper kit available as an option




Rubber encased roller bearing to help eliminate shock and axle flexing



Easy to adjust drawbar pitch with this turnbuckle



Rear tow hitch (optional on Roller and Roller Drill)

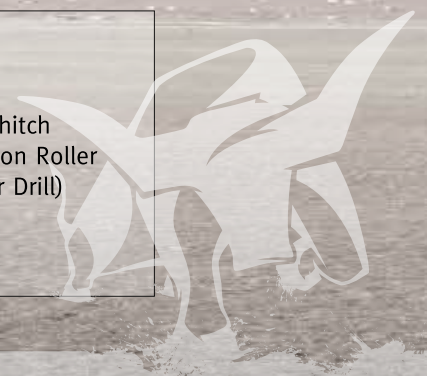

FEATURES

ROLLER DRILL AND ROLLER

Standard Equipment:

- Rubber encased roller axle bearings
- 3" roller axles
- Jack stand
- Safety chains on drawbar
- Deflector tabs on each end of the frame
- Turnbuckle for drawbar adjustment
- Safety support chain for transport
- Agitator shaft and vees in bottom of boxes (Roller Drill only)
- Weigh kit (Roller Drill only)

Optional Equipment:

- Standard or deep vee rings
- Hydraulic wheels
- Rear tow hitch
- Rear hydraulics
- Scraper Kit
- Seed level indicators (for seed bins on Roller Drill)

DIMENSIONS & CAPACITIES

ROLLER DRILL	9ft	10ft
Working width	2780mm	3105mm
Overall width	3125mm	3455mm
Length	4170mm	4170mm
Height (with wheels up)	2010mm	2010mm
Weight (unladen)	2340kg	2600kg
Box capacity (approx)	441L	488L

ROLLER	9ft	10ft
Working width	2780mm	3105mm
Overall width	3125mm	3455mm
Length	4170mm	4170mm
Weight	2040kg	2250kg

DUNCAN AG NEW ZEALAND

PO BOX 2018,
WASHDYKE 7941, TIMARU
PH: 0800 177 171
Email: admin@duncanag.co.nz

www.duncanag.com

DUNCAN AG AUSTRALIA

4B SILVERTON CLOSE,
NORTH LAVERTON, VICTORIA 3026
PH: 03 9314 9666
Email: admin@duncanag.com.au

In accordance with the company's policy of continuous improvement to its machines, alterations in specifications may be made without notice. The company accepts no responsibility for any discrepancies which may occur between specifications of its machines and the descriptions thereof contained in this publication.

